

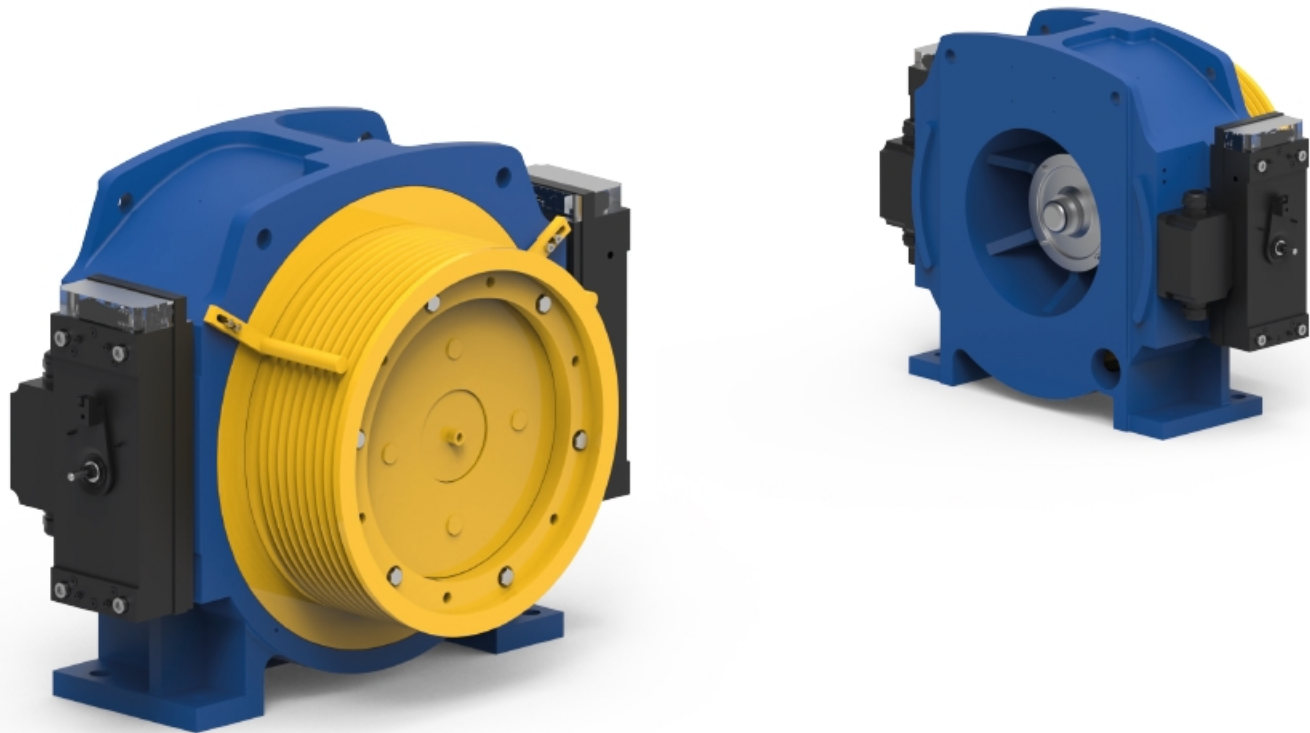


MF450

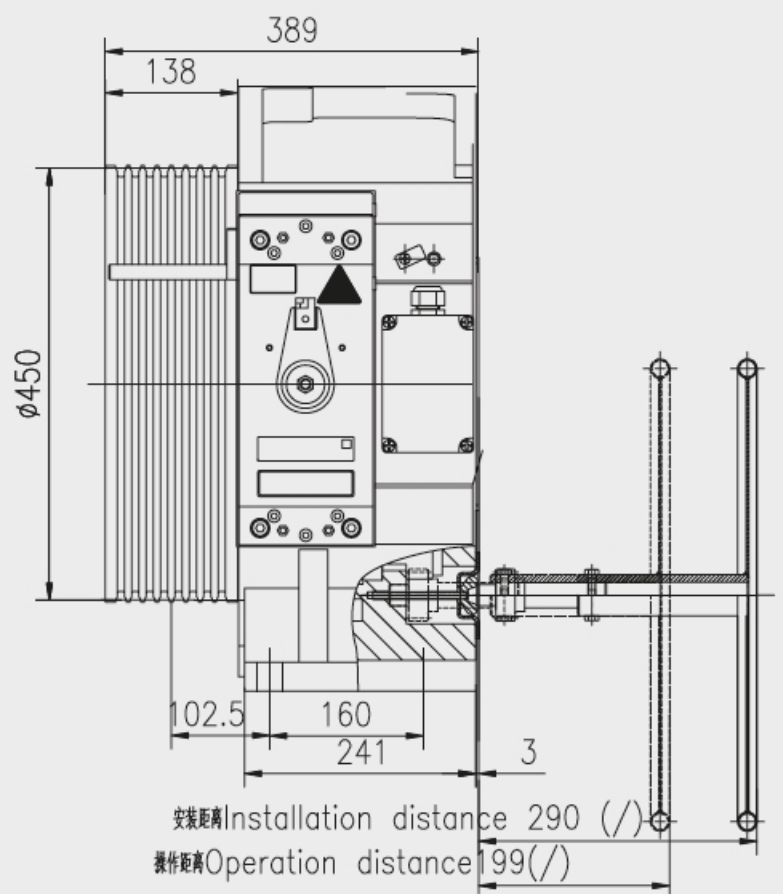

主轴静载 Static Load	额定扭矩 Nominal Torque	极数 Poles	编码器 Encoder	编码器线 Encoder Cable	根据客户需求选配 Optional	制动器参数 Brake features
4500 kg	1015 Nm S5-40%ED	32	Haidenhain 1387	7 m	电源线 Motor power cable 7 m	DZD1-653 2x1270 Nm - 2x127 W 2x1.15A - DC110V

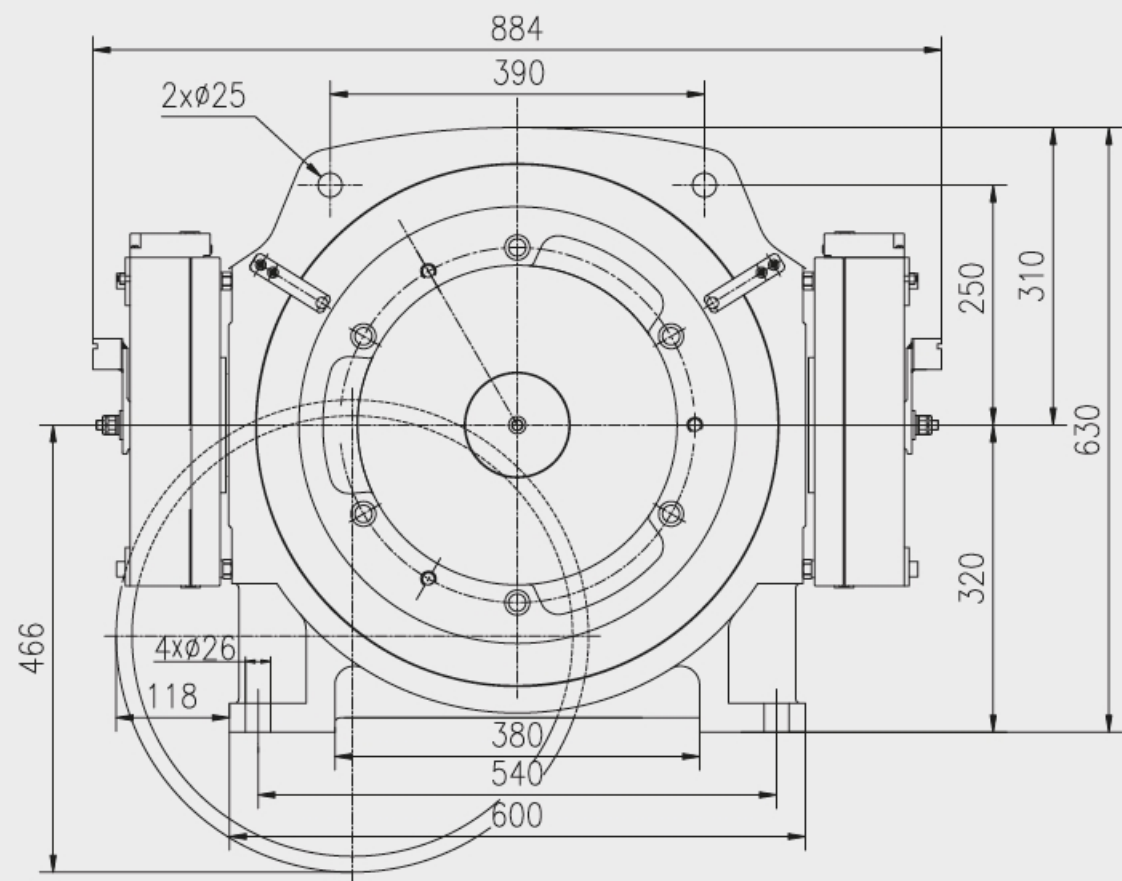

(/) 表示无盘车时无需配置
(/) Means without flywheel

1:1	额定载重 Load	额定速度 Speed	额定扭矩 Rated Torque	电机 - Motor					曳引轮 - Sheave					蒙塔纳锐型号 COD	自重 Weight
				额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current	电压 Voltage	节径 Ø	绳槽 Rope	角 Angle		槽距 Pitch		
	kg	m/s	Nm	kW	RPM	Hz	A	V	mm	n°	β	γ	mm		kg
MF450	550	1	789	3,3	40	10,6	7,5	340	480	4xØ12	96°	35°	18	MF450-100/550/1	500
		1,5		4,9	60	15,9	11,0							MF450-150/550/1	
		1,75		5,8	70	18,6	13,0							MF450-175/550/1	
		2		6,6	80	21,2	15,0							MF450-200/550/1	
	630	1	904	3,8	40	10,6	8,5	340	480	5xØ12	96°	35°	18	MF450-100/630/1	
		1,5		5,6	60	15,9	12,5							MF450-150/630/1	
		1,75		6,6	70	18,6	15,0							MF450-175/630/1	
		2		7,5	80	21,2	17,0							MF450-200/630/1	

2:1	额定载重 Load	额定速度 Speed	额定扭矩 Rated Torque	电机 - Motor					曳引轮 - Sheave					蒙塔纳锐型号 COD	自重 Weight
				额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current	电压 Voltage	节径 Ø	绳槽 Rope	角 Angle		槽距 Pitch		
	kg	m/s	Nm	kW	RPM	Hz	A	V	mm	n°	β	γ	mm		kg
MF450	1250	1	924	8,2	85	22,6	19	340	450	8xØ10	96°	35°	15	MF450-100/1250	500
		1,5		12,3	127	34,0	28							MF450-150/1250	
		1,75		14,4	149	39,6	33							MF450-175/1250	
		2		16,4	170	45,3	37,5							MF450-200/1250	
		2,5		20,5	212	56,6	47							MF450-250/1250	
		1	896	7,5	80	21,2	17,0	340	480	6xØ10	96°	35°	18	MF450-100/1250/480	
		1,5		11,2	119	31,8	25,0							MF450-150/1250/480	
		1,75		13,1	139	37,1	29,5							MF450-175/1250/480	
		2		14,9	159	42,4	33,5							MF450-200/1250/480	
		2,5		18,7	199	53,1	42,0							MF450-250/1250/480	
	1350	1	998	8,9	85	22,6	20,5	340	450	8xØ10	96°	35°	15	MF450-100/1350	
		1,5		13,3	127	34,0	30,5							MF450-150/1350	
		1,75		15,5	149	39,6	35,5							MF450-175/1350	
		2		17,7	170	45,3	40,5							MF450-200/1350	
		2,5		22,2	212	56,6	51							MF450-250/1350	
		1	968	8,1	80	21,2	18,0	340	480	7xØ10	96°	35°	18	MF450-100/1350/480	
		1,5		12,1	119	31,8	27,0							MF450-150/1350/480	
		1,75		14,1	139	37,1	32,0							MF450-175/1350/480	
		2		16,1	159	42,4	36,5							MF450-200/1350/480	
		2,5		20,2	199	53,1	45,5							MF450-250/1350/480	

Quantity of rope groove number, γ angle and β angle can be tailor-made according to customer request.
曳引轮绳槽数量, γ 角和 β 角可根据客户需求定制

应用 Use	代码 Code	配件 Accessories
有机房 MR	ACMF000003	盘车装置 Flywheel
	ACMF000006	制动器松闸手柄 Brake Release Lever
	PPMF000003	曳引轮的全防护罩 Complete Pulley Protection
无机房 MRL	ACMF000010	远程手动松闸装置 线长 7米 Remote Manual Release - 7 m wire
	ACMF000013	远程手动松闸装置 线长 10米 Remote Manual Release - 10 m wire

