


主轴静载 Static Load	额定扭矩 Nominal Torque	极数 Poles	编码器 Encoder	编码器线 Encoder Cable	根据客户需求选配 Optional	制动器参数 Brake features		
						额定载重 Load	力矩 Torque Nm	规格参数 Specification
8000 kg	2580 Nm S5-40%ED	32	Haidenhain 1387	7 m	电源线 Motor power cable 7 m	2000	2x2172	DZD1-21800 2x197 W 2x1.8 A - DC110V
						2500	2x2715	
						3000	2x3188	DZD1-25000 2x(540/135) W 2x(2.7/1.35)A - DC200/100V

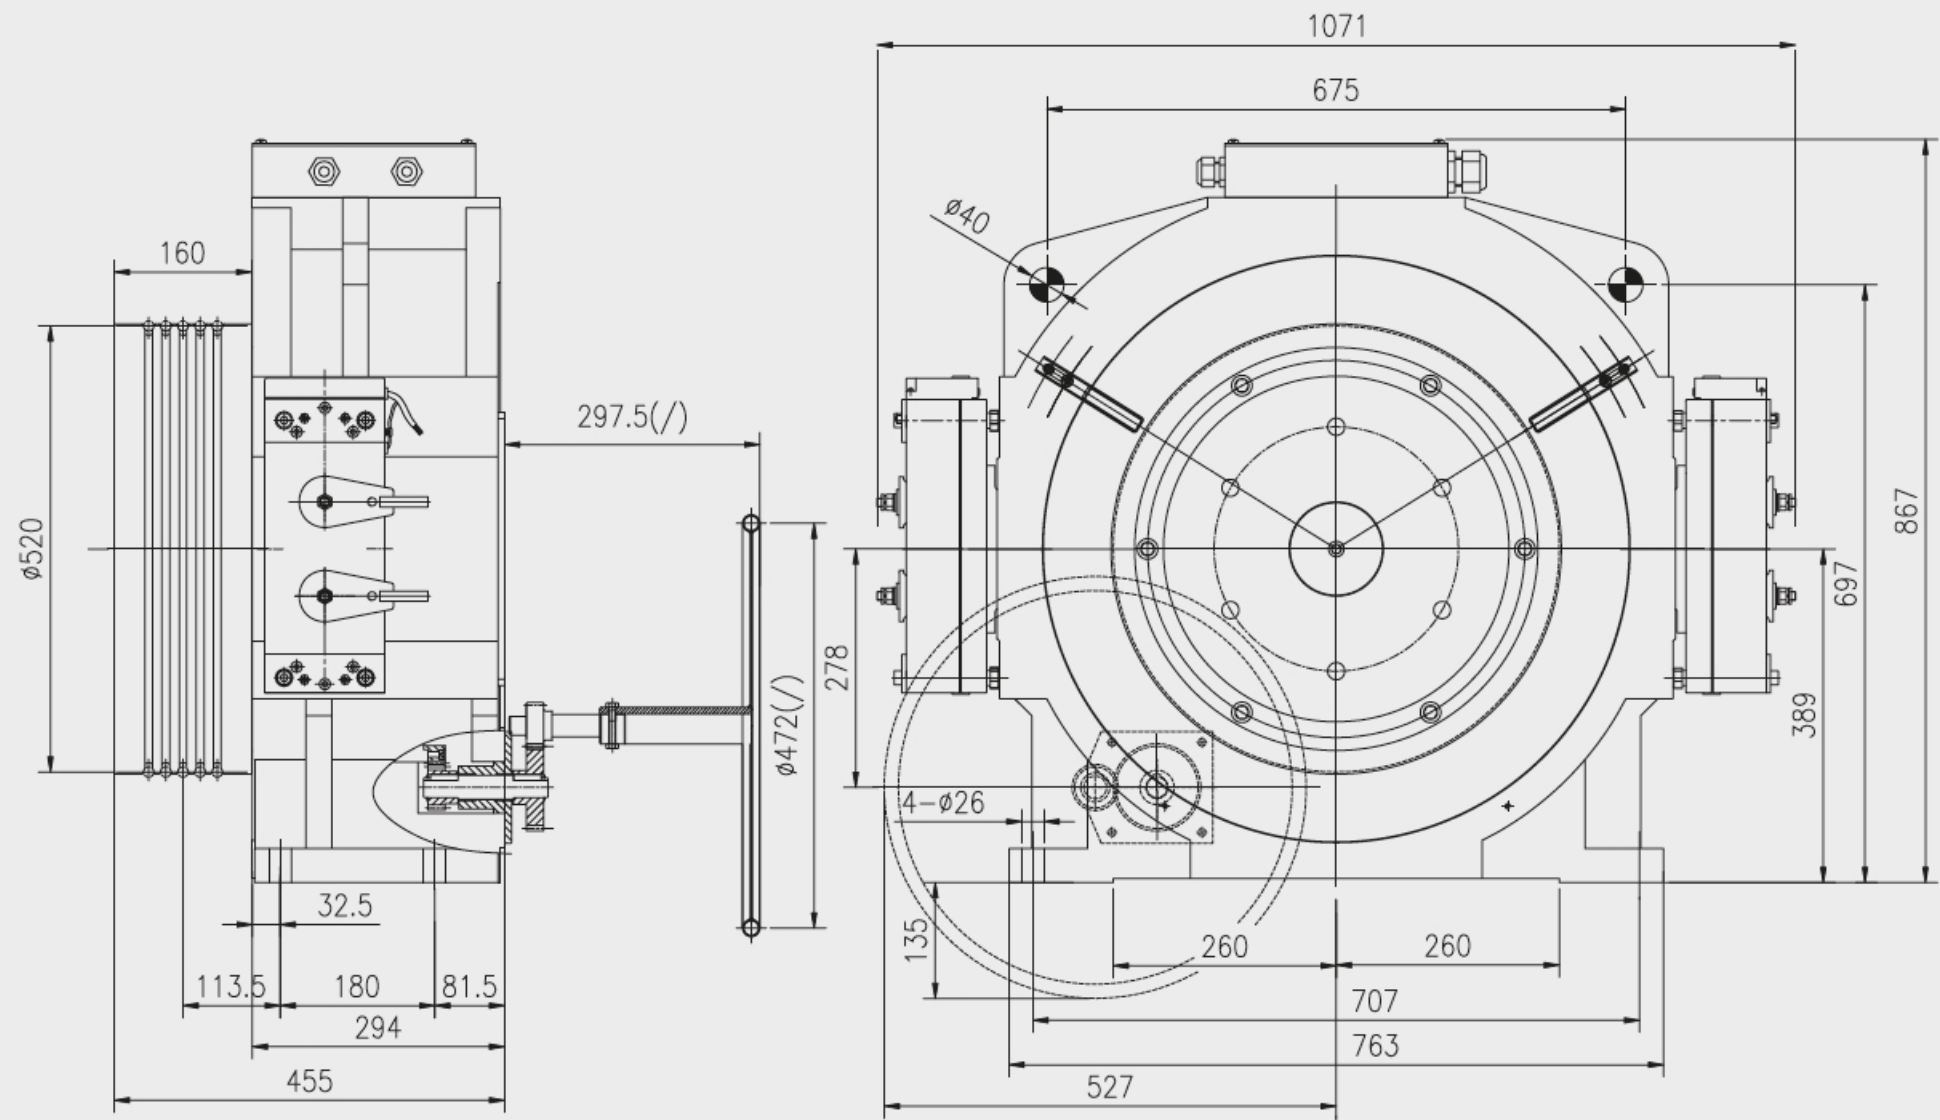

(/) 表示无盘车时无需配置
(/) Means without flywheel

1:1	额定载重 Load	额定速度 Speed	额定扭矩 Rated Torque	电机 - Motor					曳引轮 - Sheave					蒙塔纳锐型号 COD	自重 Weight
				额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current	电压 Voltage	节径 Ø	绳槽 Rope	角 Angle		槽距 Pitch		
	kg	m/s	Nm	kW	RPM	Hz	A	V	mm	n°	β	γ	mm	kg	
MF800	1350	1	2097	8,1	37	9,8	18,0	340	520	8xØ13	96°	35°	20	MF800-100/1350/1	1150
		1,5		12,1	55	14,7	27,0							MF800-150/1350/1	
		1,75		14,1	64	17,1	32,0							MF800-175/1350/1	
		2		16,1	73	19,6	36,5							MF800-200/1350/1	

2:1	额定载重 Load	额定速度 Speed	额定扭矩 Rated Torque	电机 - Motor					曳引轮 - Sheave					蒙塔纳锐型号 COD	自重 Weight
				额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current	电压 Voltage	节径 Ø	绳槽 Rope	角 Angle		槽距 Pitch		
	kg	m/s	Nm	kW	RPM	Hz	A	V	mm	n°	β	γ	mm	kg	
MF800	2000	1	1709	13,1	73	19,6	32	340	520	7xØ13	85°	35°	20	MF800-100/2000	980
		1,5		19,7	110	29,4	45							MF800-150/2000	
		1,75		23,0	129	34,3	53							MF800-175/2000	
		2		26,3	147	39,2	62,5							MF800-200/2000	
		2,5		32,9	184	49,0	75,5							MF800-250/2000	
		2,5		32,9	184	49,0	75,5							MF800-250/2000	
	2500	1	2136	16,4	73	19,6	37,5	340	520	7xØ13	85°	35°	20	MF800-100/2500	1010
		1,5		24,6	110	29,4	58							MF800-150/2500	
		1,75		28,8	129	34,3	66							MF800-175/2500	
		2		32,9	147	39,2	75							MF800-200/2500	
		2,5		41,1	184	49,0	94							MF800-250/2500	
		2,5		41,1	184	49,0	94							MF800-250/2500	
	3000	1	2564	19,7	73	19,6	45	340	520	8xØ13	85°	35°	20	MF800-100/3000	1150
		1,5		29,6	110	29,4	67,5							MF800-150/3000	
		1,75		34,5	129	34,3	79							MF800-175/3000	
		2		39,4	147	39,2	90,5							MF800-200/3000	
		2,5		49,3	184	49,0	113							MF800-250/3000	
		2,5		49,3	184	49,0	113							MF800-250/3000	

Quantity of rope groove number, γ angle and β angle can be tailor-made according to customer request.
曳引轮绳槽数量, γ 角和 β 角可根据客户需求定制

应用 Use	代码 Code	配件 Accessories
有机房 MR	ACMF000005	盘车装置 Flywheel
	ACMF000007	制动器松闸手柄 Brake Release Lever
	PPMF000005	曳引轮的全防护罩 Complete Pulley Protection
无机房 MRL	Not available for this model - 无法使用远程松闸	

