


主轴静载 Static Load	额定扭矩 Nominal Torque	极数 Poles	编码器 Encoder	编码器线 Encoder Cable	根据客户需求选配 Optional	制动器参数 Brake features			
						额定载重 Load	曳引轮 Pulley	制动力矩 Torque Nm	规格参数 Specification
6000 kg	1470 Nm S5-40%ED	32	Haidenhain 1387	7 m	电源线 Motor power cable 7 m	1600	450	2x1470	DZD1-653 2x127 W 2x1.15A DC110V
						2000		2x1838	
						1250/1350	550	2x1150	
						1600		2x1838	

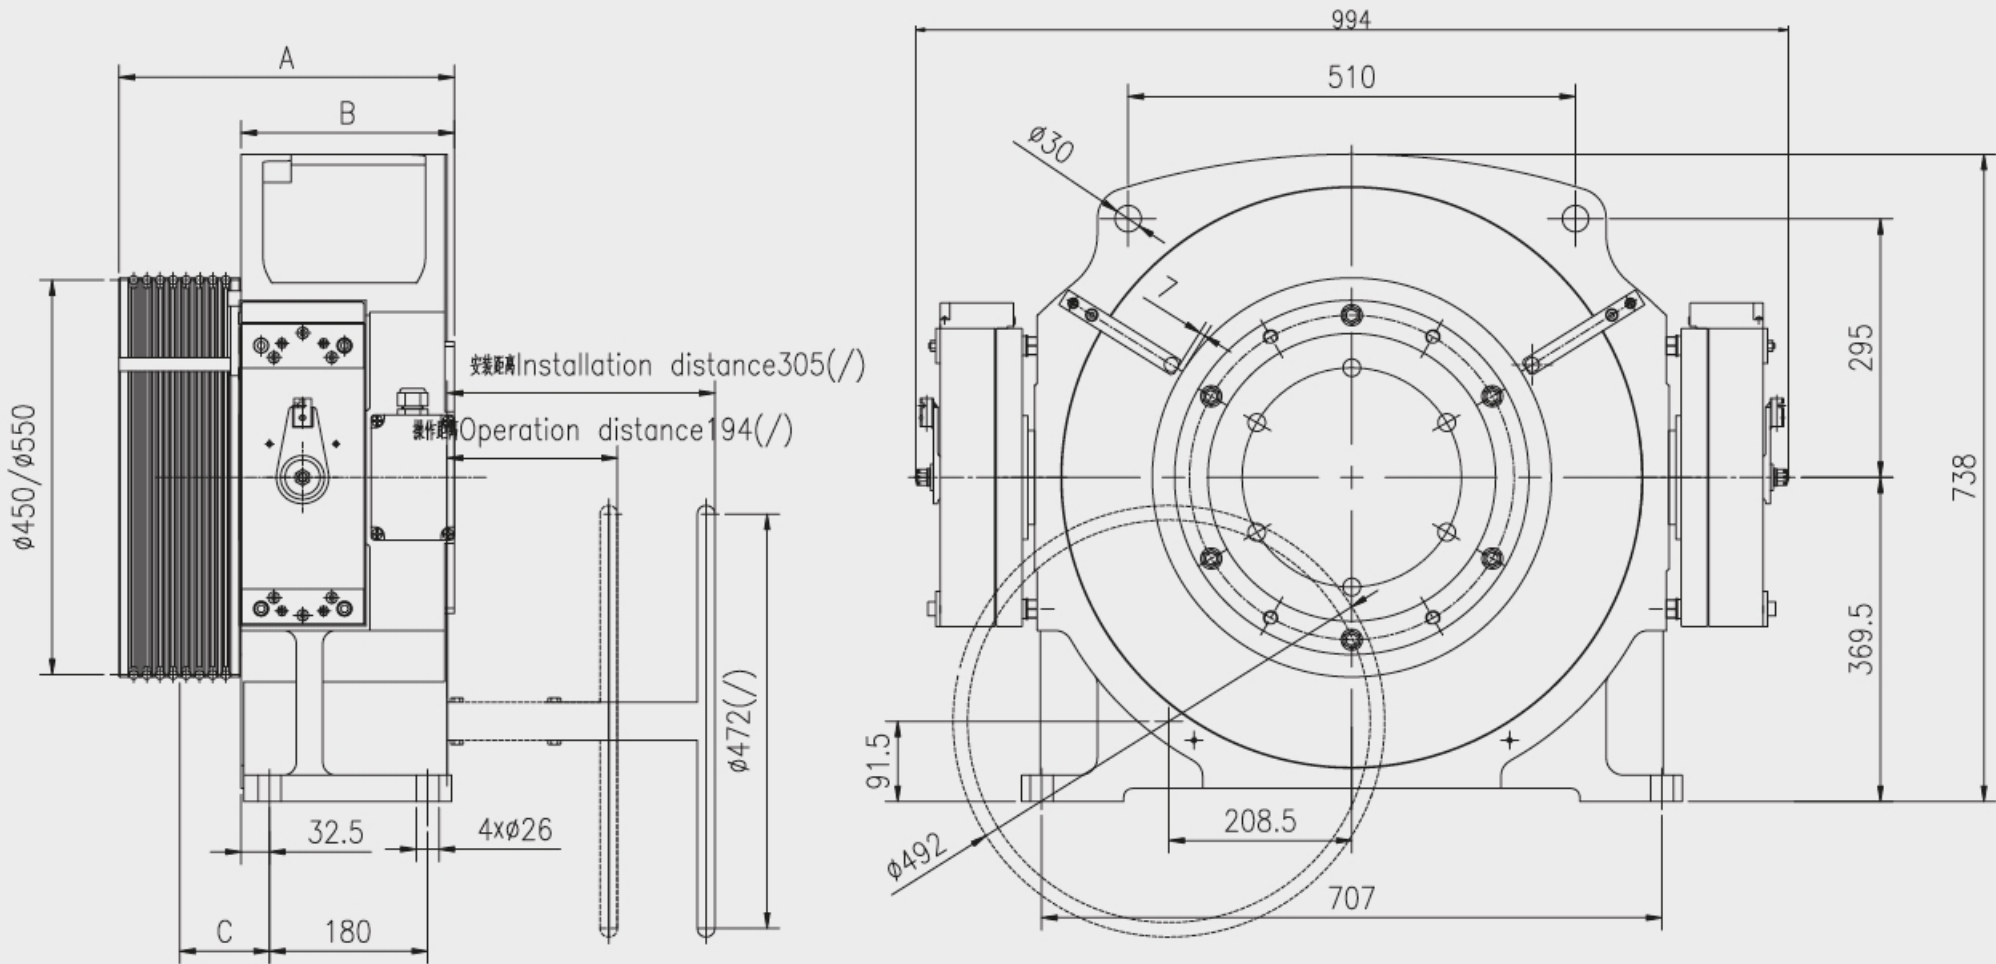

曳引轮直径 Pulley Ø	额定载重 Load	尺寸 - Size		
		A	B	C
mm	kg	mm	mm	mm
450	1600 及以下 or less	382	243	102,5
550				
450	2000	408	253	110,5

(/) 表示无盘车时无需配置
(/) Means without flywheel

1:1	额定载重 Load	额定速度 Speed	额定扭矩 Rated Torque	电机 - Motor					曳引轮 - Sheave					蒙塔纳锐型号 COD	自重 Weight					
				额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current	电压 Voltage	节径 Ø	绳槽 Rope	角 Angle		槽距 Pitch							
	kg	m/s	Nm	kW	RPM	Hz	A	V	mm	n°	β	γ	mm	kg						
MF600	800	1	1076	4,8	42	11,3	11,0	340	450	8xØ10	96°	35°	15	MF600-100/800/1	710					
		1,5		7,2	64	17,0	16,0							MF600-150/800/1						
		1,75		8,4	74	19,8	19,0							MF600-175/800/1						
		2		9,6	85	22,6	21,5							MF600-200/800/1						
	1000	1	1434	6,0	40	10,6	13,5	340	480	8xØ12	96°	35°	18	MF600-100/1000/1						
		1,5		9,0	60	15,9	20,0							MF600-150/1000/1						
		1,75		10,5	70	18,6	23,5							MF600-175/1000/1						
		2		12,0	80	21,2	27,0							MF600-200/1000/1						

2:1	额定载重 Load	额定速度 Speed	额定扭矩 Rated Torque	电机 - Motor					曳引轮 - Sheave					蒙塔纳锐型号 COD	自重 Weight	
				额定功率 Power	额定转速 RPM	额定频率 Freq.	额定电流 Current	电压 Voltage	节径 Ø	绳槽 Rope	角 Angle		槽距 Pitch			
	kg	m/s	Nm	kW	RPM	Hz	A	V	mm	n°	β	γ	mm	kg		
MF600	1250	1	1123	8,2	70	18,4	19	340	550	7xØ13	85°	35°	20	MF600-100/1250	670	
		1,5		12,3	104	27,7	30,5							MF600-150/1250		
		1,75		14,4	122	32,5	33							MF600-175/1250		
		2		16,4	139	37,1	40							MF600-200/1250		
		2,5		20,5	174	46,4	47							MF600-250/1250		
		2,5		20,5	174	46,4	47							MF600-250/1250		
	1350	1	1213	8,9	70	18,4	20,5	340	550	7xØ13	85°	35°	20	MF600-100/1350	670	
		1,5		13,3	104	27,7	33							MF600-150/1350		
		1,75		15,5	122	32,5	35,5							MF600-175/1350		
		2		17,7	139	37,1	40,5							MF600-200/1350		
		2,5		22,2	174	46,4	51							MF600-250/1350		
		2,5		22,2	174	46,4	51							MF600-250/1350		
	1600	1	1437	10,5	70	18,4	24	340	550	7xØ13	85°	35°	20	MF600-100/1655	710	
		1,5		15,8	104	27,7	36							MF600-150/1655		
		1,75		18,4	122	32,5	42							MF600-175/1655		
		2		21,0	139	37,1	48							MF600-200/1655		
		2,5		26,3	174	46,4	60							MF600-250/1655		
		2,5		26,3	174	46,4	60							MF600-250/1655		
		1	1176	10,5	85	22,6	24	340	450	8xØ10	96°	35°	15	MF600-100/1645	640	
				1,5	15,8	127	34,0							36		MF600-150/1645
				1,75	18,4	149	39,6							42		MF600-175/1645
				2	21,0	170	45,3							48		MF600-200/1645
	2,5			26,3	212	56,6	60							MF600-250/1645		
	2,5			26,3	212	56,6	60							MF600-250/1645		
	2000	1	1470	13,1	85	22,6	30	340	450	9xØ10	96°	35°	15	MF600-100/2000	682	
		1,5		19,7	127	34,0	45							MF600-150/2000		
		1,75		23,0	149	39,6	52,5							MF600-175/2000		
		2		26,3	170	45,3	60							MF600-200/2000		

Quantity of rope groove number, γ angle and β angle can be tailor-made according to customer request.

曳引轮绳槽数量, γ 角和 β 角可根据客户需求定制

应用 Use	代码 Code	配件 Accessories
有机房 MR	ACMF000004	盘车装置 Flywheel
	ACMF000006	制动器松闸手柄 Brake Release Lever
	PPMF000004	曳引轮的全防护罩 Complete Pulley Protection
无机房 MRL	ACMF000010	远程手动松闸装置 线长 7米 Remote Manual Release - 7 m wire
	ACMF000013	远程手动松闸装置 线长 10米 Remote Manual Release - 10 m wire

Remote Manual Release in MF600 applicable to: 远程松闸适用范围

Ø450mm pulley with 1600kg load or less - 450mm 曳引轮 1600kg 及以下

Ø550mm pulley with load 1350 kg or less - 550mm 曳引轮 1350kg 及以下

Ø450mm pulley with load 2000kg and Ø550mm pulley with load 1600kg can not use Remote Manual Release - 450mm 2000kg 及 550mm 1600kg 时无法使用

